



LOCKS WITH DEAD BOLT AND SPRING LATCH

Functions

Central lock with front closing, slip-on version for aluminium uprights , with spring latch and sliding bolt.

Technical Features

Lock compatible with European profile cylinders, has a dead bolt and a reversible spring latch (RH or LH).

Bolts operated with the cylinder.

Spring latch operated with the cylinder and with the 8 mm handle spindle.

Cylinder handle C/C distance 85 mm.

Dead bolt with thickness of 10 mm and protrusion of 15 mm.

10 to 13,5 mm adjustable spring latch.

Materials


Lock cover plate and case plate in zinc plated steel

Flat front in stainless steel

Nickel plated brass spring latch and bolt

Nickel-plated steel bolt

Zinc plated steel cylinder fixing screw

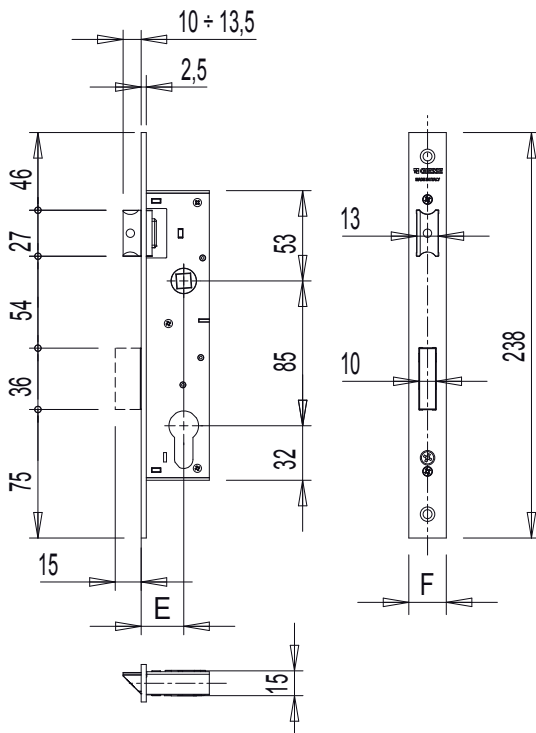

Item code	Description	Backset E [mm]	Front width F [mm]	Compatible counterplates	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
0763001	CENTRAL LOCK FRONT E.25 mm	25	22	0465801	X				1
0763101	CENTRAL LOCK FRONT E.30 mm	30	22	0465801	X				1
0763201	CENTRAL LOCK FRONT E.35 mm	35	22	0465801	X				1